

WI-FI MANUAL

**Download and
Operation**



- ※ Thank you for purchasing this product.
- ※ Please read this manual carefully and thoroughly before operating the unit.
- ※ Take care of this manual for future reference.

Thaleos WIFI connection Guide

1. Introduction

The air conditioner is equipped with remote control technology, with a WIFI module inside the unit connected to the display and controller of the air conditioner. The air conditioner must be constantly connected to a wireless router or access point connected to the internet. Mobile devices such as smart phones and tablets, on which dedicated applications are installed and WIFI modules are subsequently configured, can be used as remote controls once connected to the internet.

Download and install the control software



The control software can be downloaded and installed as follows.

- ① For mobile devices such as smart phones and tablets, search and download "Thaleos Connect" from Google Play or App Store and install it.
- ② You can also scan the "QR code" below, which will automatically direct you to the download interface for installing the software.
- ③ Follow the instructions on the app step by step.

2. Connection


① Place the device next to your WIFI router. Connect your smart phone to Wi-Fi.

Note: This device can only be used with a 2.4GHz router. If your WIFI is 5 GHz, set it to 2.4 GHz. When the WIFI connection is successful, the WIFI icon will remain on and will not blink.


② Open the "Thaleos Connect" APP and log into your account.

③ Access the main interface of the application. Press '+', select scan, scan the QR code of the indoor unit (please see below for the QR code of the indoor unit)

Note: The function of scanning the QR code: Name the indoor unit in the APP, and set the control interface. If there is no QR code, you can also directly select 'Add device' and then select the 'air conditioner (Wi-Fi)' in 'Large home application'.

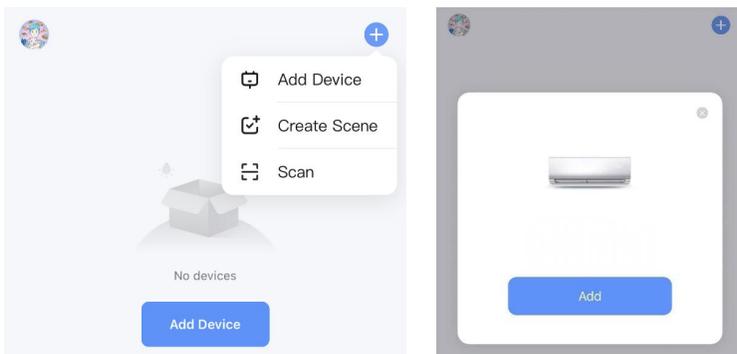



When there is an indoor unit QR code

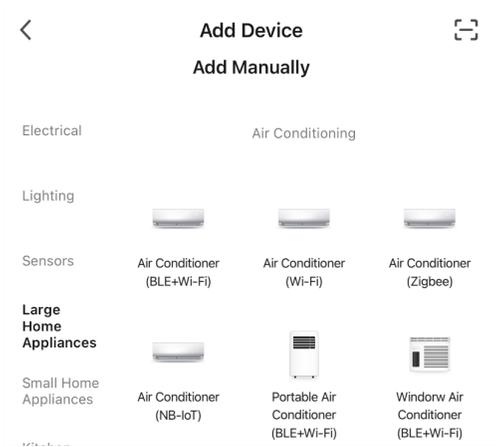


When there is no indoor unit QR code



④ Follow the instructions to enter the password for the 2.4Ghz network and press 'Next'.

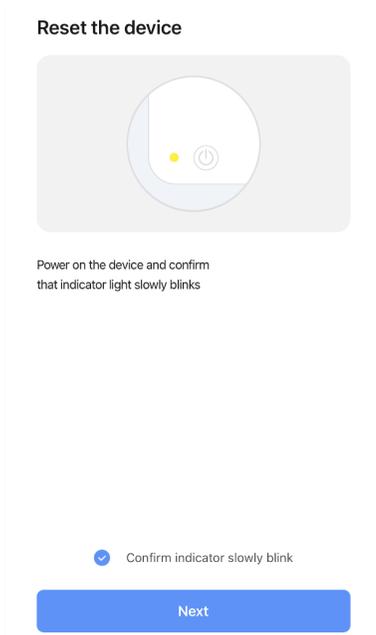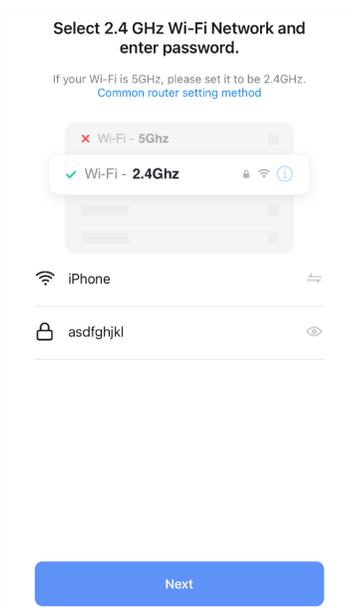



⑤ Reset WIFI: When the air conditioner is running, press the "COOL" key and "+" key at the same time for 3 seconds, you will hear "beep" 8 times, after 2 seconds, you will hear two "beeps", reset successfully. Then, press 'Next'.

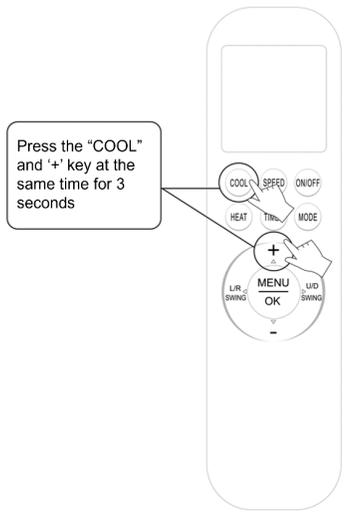



Note:

- a. If the reset is incorrect, repeat.
 - b. If the WIFI indicator blinks quickly, you can connect it directly.
 - c. Once the device is connected, the WIFI indicator will light up.
- Long press the timing key to disconnect the device and turn off the WIFI indicator.

⑥ Press 'Join' to join the network.

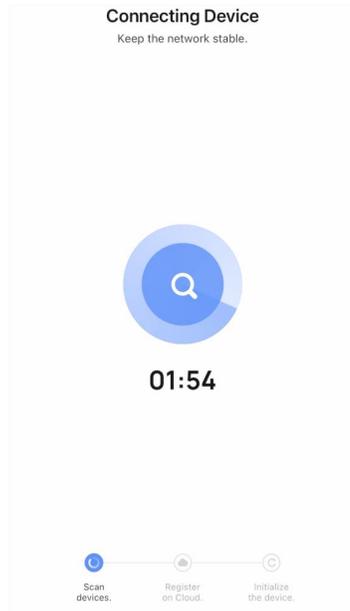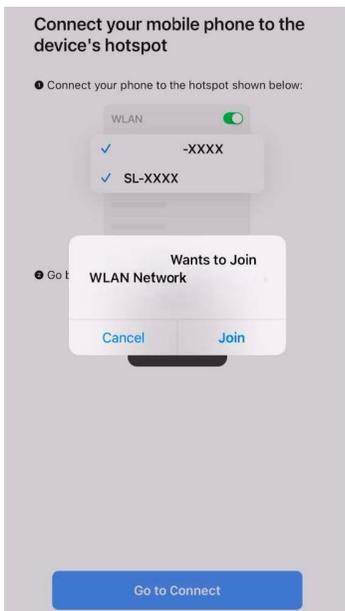

⑦ Set up successfully, you can now use the APP to control the air conditioner.

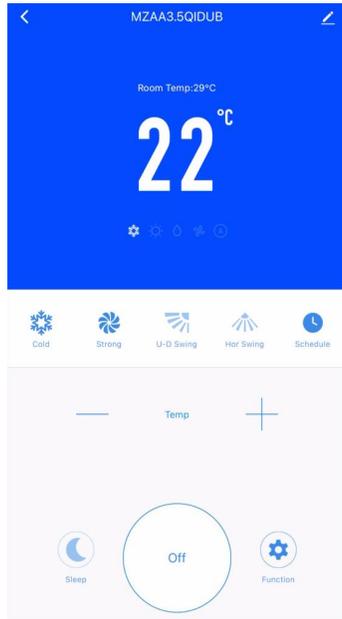

THALEOS[®]
Energy efficiency

